

TMM5 PLUS



SURGICAL STRETCHER-CHAIR

SPECIFICATIONS

| SPECIFICATION DESCRIPTION | MODELS* | | | |
|---|------------------------------|------------------------------|------------------------------|------------------------------|
| | TMM5 PLUS-B | TMM5 PLUS-LB | TMM5 PLUS-WB | TMM5 PLUS-WTB |
| Maximum Patient Weight | 500 lb (227 kg) | 500 lb (227 kg) | 500 lb (227 kg) | 500 lb (227 kg) |
| Seat Height, Low | 24.3" (61.7 cm) | 22.8" (57.9 cm) | 24.3" (61.7 cm) | 23.8" (60.5 cm) |
| Seat Height, High | 32" (81.3 cm) | 30.5" (77.5 cm) | 32" (81.3 cm) | 39.6" (100.6 cm) |
| Back Height | 33.75" (85.73 cm) | 33.75" (85.73 cm) | 33.75" (85.73 cm) | 33.75" (85.73 cm) |
| Side Rail Height, Up (seat pan to rail top) | 13.5" (34.3 cm) | 13.5" (34.3 cm) | 13.5" (34.3 cm) | 13.5" (34.3 cm) |
| Overall Chair Height, Low | 56" (142.24 cm) | 53" (134.62 cm) | 56" (142.24 cm) | 56" (142.24 cm) |
| Overall Chair Height, High | 64" (163 cm) | 70" (177.8 cm) | 64" (163 cm) | 71" (181 cm) |
| Seat Width | 24" (61 cm) | 24" (61 cm) | 28" (71 cm) | 28" (71 cm) |
| Overall Width (rails up) | 30" (76 cm) | 30" (76 cm) | 34" (86 cm) | 34" (86 cm) |
| Overall Width (rails down) | 24" (61 cm) | 24" (61 cm) | 28" (71 cm) | 28" (71 cm) |
| Patient Surface Length (excludes "F" option) | 79" (201 cm) | 79" (201 cm) | 79" (201 cm) | 79" (201 cm) |
| Side Rail Length | 27.6" (70.1 cm) | 27.6" (70.1 cm) | 27.6" (70.1 cm) | 27.6" (70.1 cm) |
| Backrest Articulation Range | 0° - 75° | 0° - 75° | 0° - 75° | 0° - 75° |
| Headpiece Articulation Range (fully elevated - fully retracted) | 30° - 60° | 30° - 60° | 30° - 60° | 30° - 60° |
| Headpiece Adjustment Range (Lowered - Raised) | .9" - 3.5" (2 cm - 9 cm) | .9" - 3.5" (2 cm - 9 cm) | .9" - 3.5" (2 cm - 9 cm) | .9" - 3.5" (2 cm - 9 cm) |
| Trendelenburg** | 5° | 5° | 5° | 5° |
| Wheelbase (length X width) | 30" x 20" (76 cm x 51 cm) | 30" x 20" (76 cm x 51 cm) | 30" x 20" (76 cm x 51 cm) | 30" x 20" (76 cm x 51 cm) |

* All models not represented. Additional configurations available.

** An additional 2° of Trendelenburg is achieved when the Manual Quick Release is utilized.

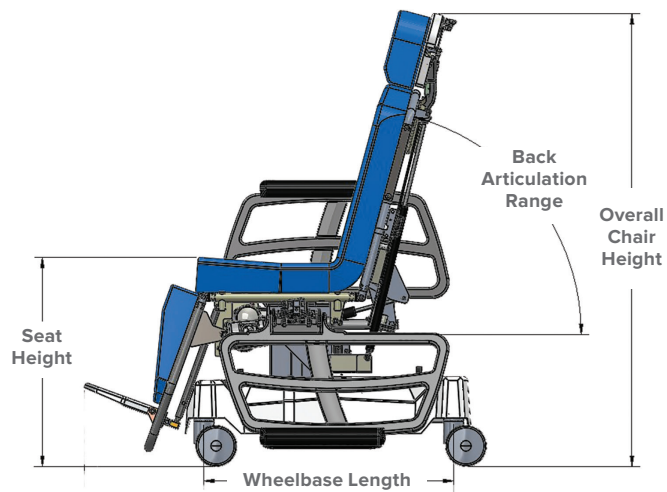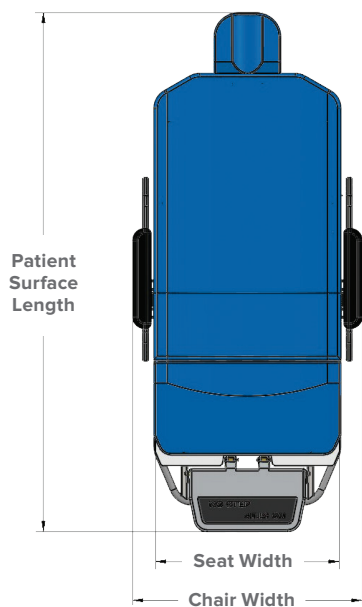


ONE PATIENT, ONE SURFACE®

TMM5 SURGICAL STRETCHER-CHAIR SPECIFICATIONS

| CHARGING SYSTEM SPECIFICATIONS | "B" OPTION | "A" OPTION |
|--------------------------------|------------------------------|------------------------------|
| Input, Volts | 100V - 240V | 120V |
| Input, Current | 1.0A (Max) | 1.6A (Max) |
| Input, Frequency | 50HZ / 60HZ | 60HZ |
| Output | +24V - 1.5A | +24V - 7A |
| Maximum Power | 36W | 36W |
| Battery Packs | 24V – 4.5Ah Sealed Lead Acid | 24V - 4.5Ah Sealed Lead Acid |


8-BUTTON PENDANT

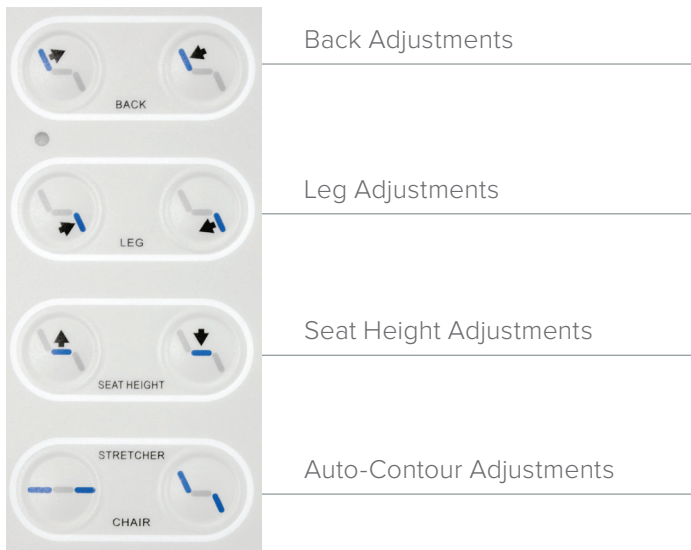

ELECTRICAL SPECIFICATIONS

| | |
|-------------------|-------------------------|
| Mode of Operation | 1 Min Load / 9 Min Rest |
| Voltage | 24V DC |

NOTE: Winco Mfg., LLC reserves the right to revise specifications without notice.



CONTACT US

To arrange a demonstration or to speak with one of our associates, please feel free to contact us at:
800-237-3377 | WincoMfg.com | 5516 SW 1st Lane, Ocala, FL 34474 | Info@WincoMfg.com